


**ENGINEERING & PLANNING**

Municipal  
Consulting  
Construction  
Residential  
Commercial  
Industrial  
Construction Management

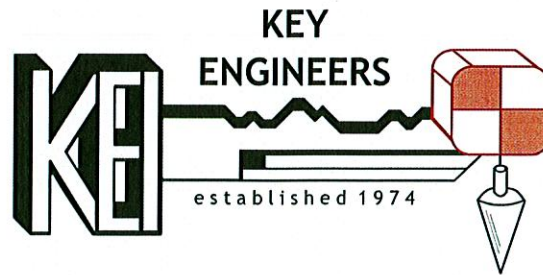

*~Celebrating Over 49 Years of Excellence~*

**SURVEYING**

Residential  
Commercial  
Industrial  
Governmental  
Construction

September 27, 2023

*\*Sent via Email*

TO: All Prospective Bidders

RE: Police Department Renovations at the Municipal Building (R.F.I. No. 2)  
229 Trenton Avenue, Borough of Barrington,  
Camden County, New Jersey (KEI #11-411BR1116)

Dear Prospective Bidder:

Our office has received the following, additional, "Requests for Information" (RFI's) in regard to the above referenced project. Our responses are shown in italics as follows:

1. The proposal form has the contractor breaking it down by each individual room. It also mentions the parking lot improvements that aren't in the scope.

*The car port is not named parking lot. It is named "parking area".*

2. Is the HVAC being done separate or is there to be an allowance ?

*Allowance should be included in each respective item in the Proposal.*

3. The demo sheet calls to remove supply vents and returns but the plans do not show the new locations.

*The new locations are depicted on Sheet No. 9.*

4. Will there be a reflected ceiling plan?

*No, see chart on Sheet No. 3 for locations/rooms acoustic ceiling tiles and Sheet No. 9 for the general acoustic ceiling tiles, vents and return general layout. The licensed electrician shall be responsible for the electrical plan (see "Electrical, Complete" specification - Page C12 to Page C19).*



5. Is the existing baseboard hear hydro. supplied by boiler or electric?

*The baseboard is hydronic in Room 112 and the baseboard is electric in Room 156/157.*

6. Is that piece of baseboard in Room 112 that needs to be removed (referenced on the DEMO plan) hydronic or electric?


*The baseboard is hydronic in Room 112.*

7. Can the engineer please provide a count of the number of supply and return grilles that need to be removed and reinstalled? I do not see a formal HVAC drawing.

*The returns/vents to be removed or reset/relocated are depicted on Sheet No. 3. There are fifteen (15) returns/vents to be removed. There are two (2) returns/vents to be reset/relocated. There are two (2) new exhaust fans. The new returns/vents are depicted on Sheet No. 9. There are twenty-three (23) new returns/vents.*

If you have any questions please contact Mr. Greg Evans, Project Manager (Ext. 28 or email: [gevans@keyengineers.com](mailto:gevans@keyengineers.com)) or myself (Ext. 27 or email: [gfusco@keyengineers.com](mailto:gfusco@keyengineers.com)) at this office.

Sincerely,

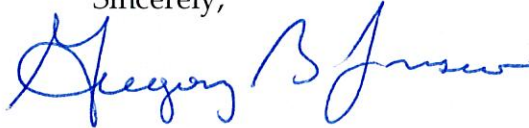

Gregory B. Fusco, P.E., P.P., C.P.W.M.  
Certified Municipal Engineer  
Barrington Borough Engineer

GE:ke